


SERIES GE

Eggcrate Grilles

PUBLICATION

GRILLES 4

JUNE 2025

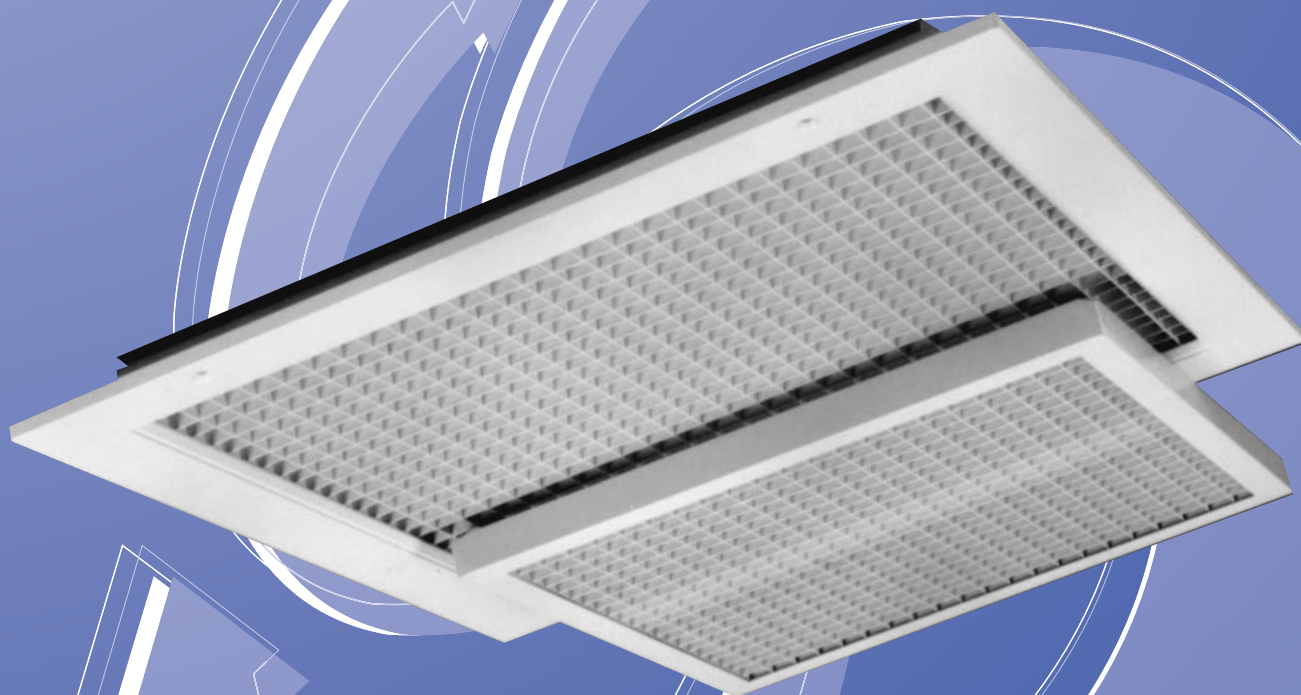

Features

- 13mm Eggcrate Core.
- Flange or Channel Frame Border.
- Wide Flexible Size Range.
- Extruded Aluminium Construction.



GILBERTS

SERIES GE

Eggcrate Grilles

Introduction

Gilberts GE Series provides a comprehensive and traditional range of Eggcrate type grilles to suit all types of extract application in ceiling and walls. Attractively styled with a 13mm square Eggcrate type core the GE is available in either a 32mm flange border frame suitable for all general purpose sidewall

and ceiling installations or a channel frame border particularly suited for lay in, suspended ceiling applications.

Series Options:


- TYPE GECA** - 13mm square Eggcrate grille in 32mm flange frame.
- TYPE GEC** - 13mm square Eggcrate grille in channel border frame.

Both GECA and GEC units are available complete with screw driver operated, rear mounted opposed blade volume control dampers as well as other accessories such as knob operated dampers and special fixings such as concealed bracket.

Standard finish on the GE Series is a Polyester Powder White. Other special colours and finishes are available on request.

Features

- 13mm Eggcrate Core.
- Flange or Channel Frame Border.
- Wide Flexible Size Range.
- Extruded Aluminium Construction.

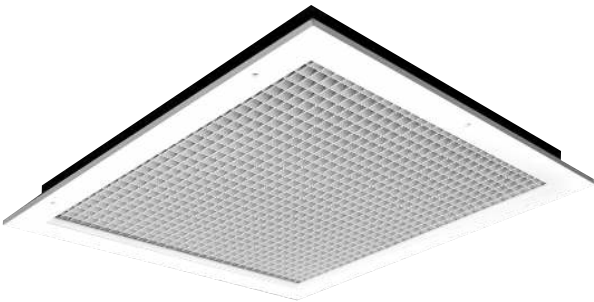

Performance Data

All GE type units can be sized and selected from the nomogram up to a maximum size of 1200 x 1200.

References used:

PRESSURE: All pressures are in Pa (N/m²).

SOUND: measured in average dBA level.

K Factor (free area) on the GE Series is approx 90%.



Selection Procedure

Referring to table determine the maximum permissible velocity relative to the volume for the application. Reference can then be made to the Series GE sizing nomogram from which the terminal size can readily be determined and additional data such as sound levels, jet velocity and pressure drops calculated. Please note that noise level data is only available down to NC20. For selection at lower noise levels please consult with our technical department.


Table of Recommended Velocities

Space Served	Sound Level db 'A' Scale	Air Volume	0.05 m ³ /s	0.25 m ³ /s	1.0 m ³ /s
Broadcasting & Recording Studios	20 - 25	Velocity m/s	2.0	1.5	1.0
Board or Conference Rooms, Churches, Concert Halls, Hospitals, Lecture Theatres, Offices, Hotels, Private Houses	30	Velocity m/s	3.0	2.5	2.0
Banks, Courtrooms, General Offices, Libraries, School Classrooms	35	Velocity m/s	3.5	3.0	2.5
Cinemas, Department Stores, Restaurants	40	Velocity m/s	4.0	3.5	3.0
Computer Rooms, Supermarkets	45	Velocity m/s	4.5	3.75	3.25
Laundries and Kitchens, Typing Pools, Pools, Sports Arenas	50	Velocity m/s	5.0	4.25	3.5
Light Engineering Factories, Heavy Engineering Factories	60	Velocity m/s	8.0	6.5	5.0

Type GECA

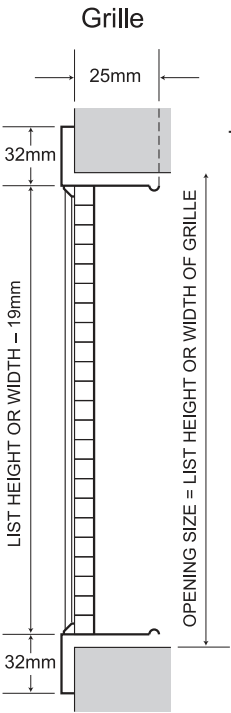
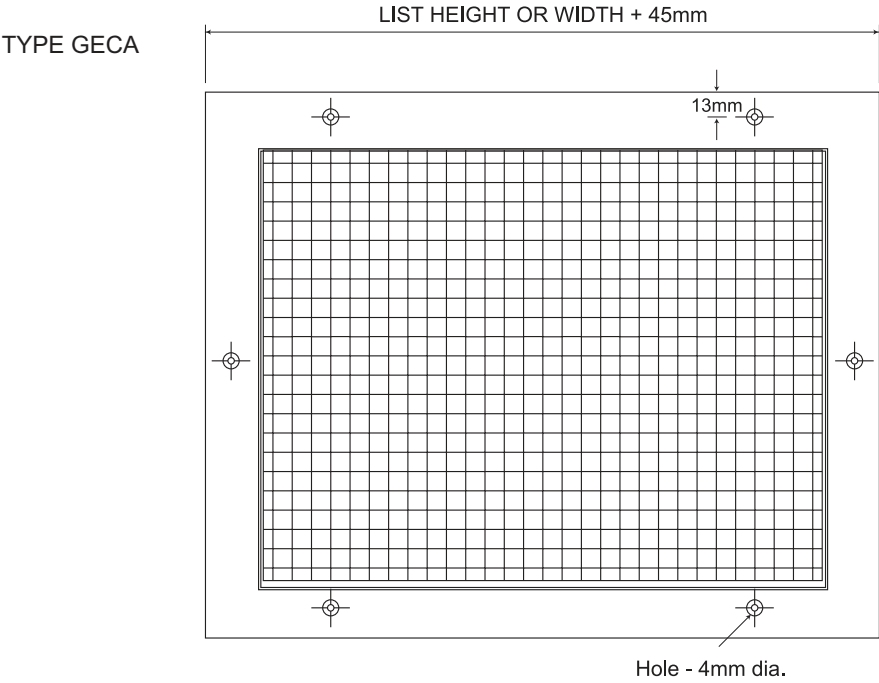


TYPE GECA

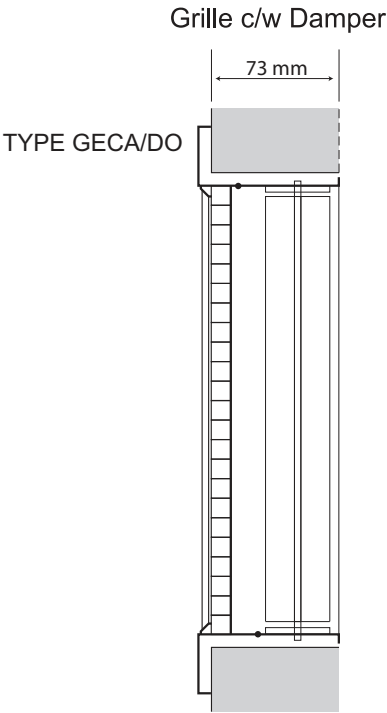




Type GEC

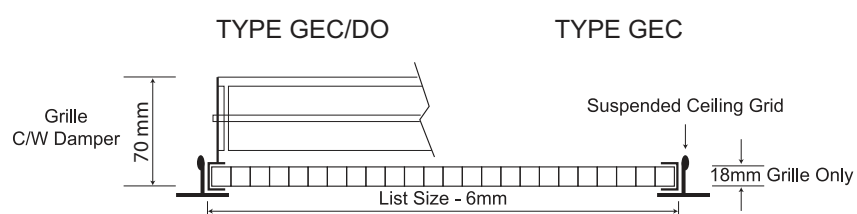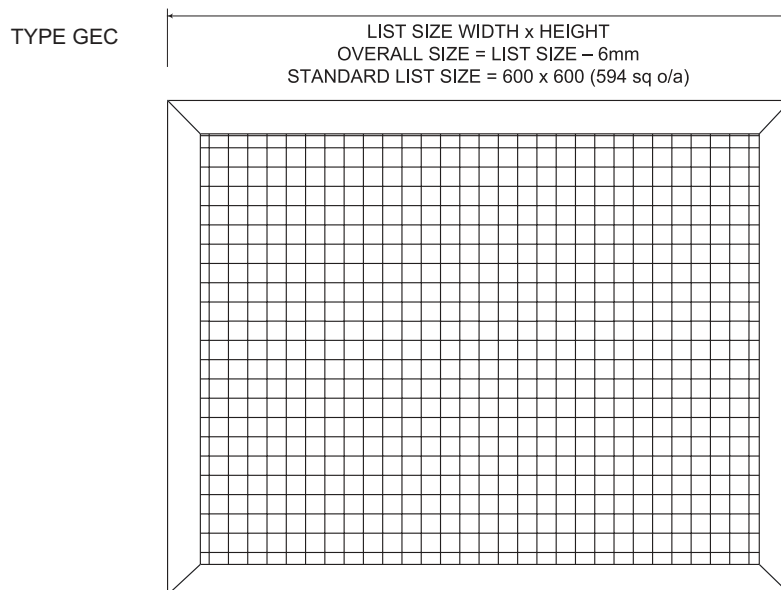



Sizing Nomogram

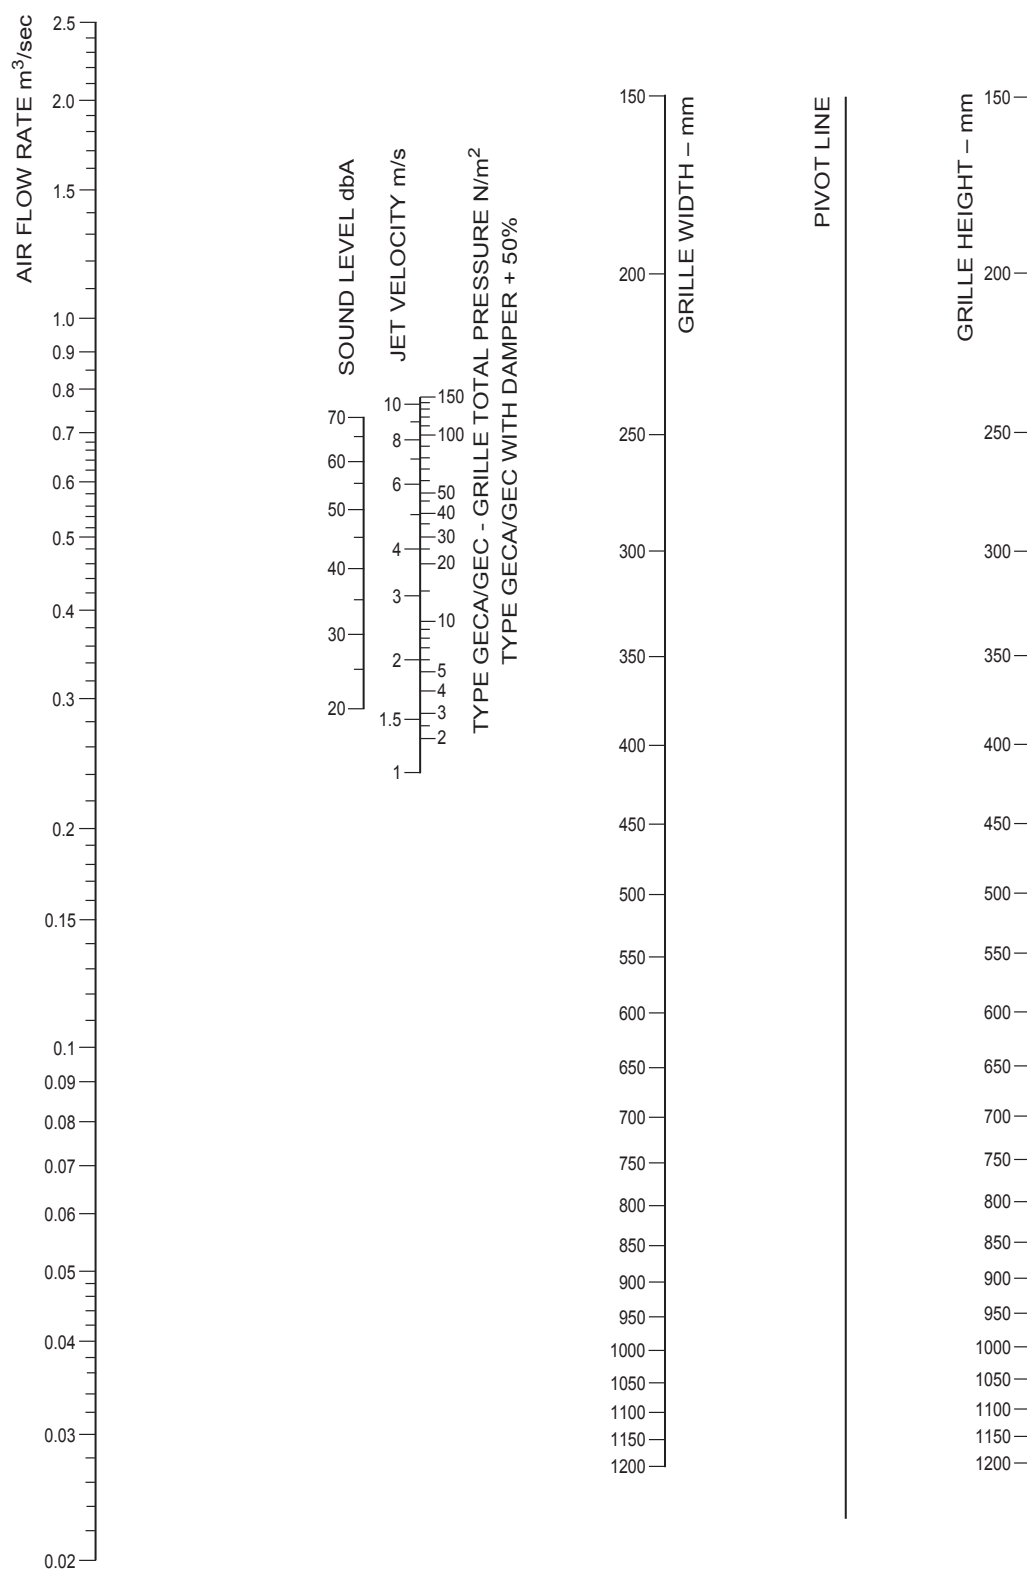

SERIES GE

Eggcrate Grilles

Ordering Specification

SERIES: GECA GEC	GEC	600 x 600	CB	DO	PPC RAL 9010 20% Gloss (Standard Finish)	4
LIST SIZE: (Width x Height mm)						
SPECIAL FIXING OPTIONS: Concealed Bracket Fixing.....CB Quick Release Fixing....QR Leg Bracket.....LB						
ACCESSORIES: Opposed Blade Damper..DO Knob Operated Damper...DK For Matt Black finish on damper add ref. BB i.e DO/BB						
FINISH: (please specify)						
NUMBER REQUIRED						

Finish

- Standard Finish:** Polyester Powder Coat White
RAL 9010 20% Gloss
(Dampers mill finish).
- Special Finishes:** Polyester Powder finish to
Stock BS or RAL colour.
(Dampers mill finish aluminium)

Size Range

From 100 x 100 up to 1200 x 1200 in 1mm
increments as standard.

For other sizes please contact HeadOffice.

Standard list size on GEC is
600 x 600 (594 x 594 o/all).

Fixing

- GECA:** Standard Flange Screw Fixing.
- GEC:** Lay-in application. No fixings
provided.

Options

Special fixings, border options, damper options and
plenum options are detailed separately in the grille
section options and accessories data.

Suspended Ceilings

All items installed into suspended ceilings must be
supported independently of the grid. Any feature
offered to suit ceiling type, is for alignment purposes only.

GILBERTS

Head Office and Works
GILBERTS (BLACKPOOL) LTD
Gilair Works, Clifton Road,
Blackpool.
Lancashire FY4 4QT.
Telephone: (01253) 766911
e-mail: sales@gilbertsblackpool.co.uk
Web: www.gilbertsblackpool.com

